
SENTRY
SECURE BY DEFINITION

PRODUCT GUIDE
ROLLER SHUTTERS

Sentry Automation Ltd

50mm single-skin flat profile shutter lath

Flush-faced steel lath.
Solid, perforated or punched options.

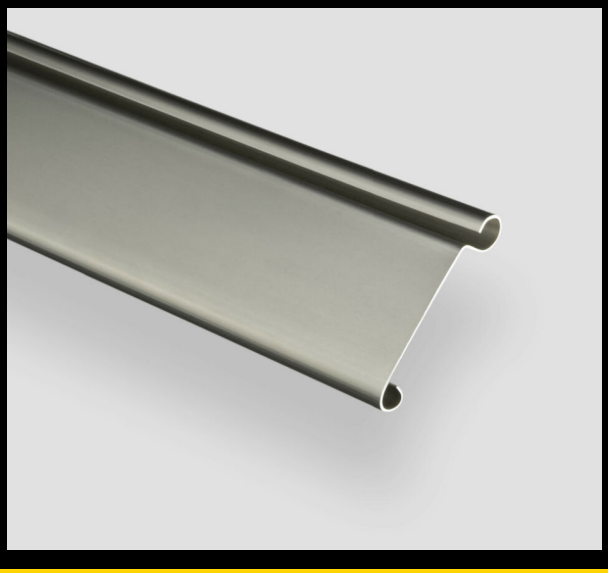

RETAIL & COMMERCIAL | **SERVERY HATCHES** | **SMALL WINDOWS**

A traditional 50mm flat steel lath for smaller shutters where a flush face is required. Typical applications include servery hatches, small windows and shopfronts. Solid, perforated and punched patterns provide a choice of screening, visibility and airflow.

PRODUCT SPECIFICATION

Profile	50mm (2-inch) single-skin flat lath
Standard material	0.9mm galvanised steel (20 swg)
Steel standard	BS EN 10346:2015
Solid weight	13.32 kg/m²
Perforated weight	9.20 kg/m²
Punched weight	10.52 kg/m²
Perforated vision	Published 30% visibility
Punched openings	152 × 28mm; 50mm spacing for Inline and Brickbond patterns

FINISH & PATTERN OPTIONS

Galvanised steel or powder coating in a choice of colours. Available solid, perforated, Inline punched or Brickbond punched. Laths are cut to length and pre-pierced for endlocks. Pattern and finish availability are confirmed with your quotation.

SUPPORT FROM SENTRY

Supply-only options
New shutter installations
Replacement curtain enquiries
Repairs and planned servicing
Nationwide project support

LET’S SPECIFY YOUR SHUTTER

Send your opening width and height, site postcode, photographs and preferred finish. Tell us whether you need supply only or installation; we’ll confirm the specification and lead time.

Lath selection, curtain size, operating equipment and safety provisions are confirmed for each project. Published weights relate to the specified lath pattern. Final curtain suitability is subject to design review.