
SENTRY
SECURE BY DEFINITION

PRODUCT GUIDE
ROLLER SHUTTERS

Sentry Automation Ltd

75mm twin-skin insulated shutter lath

Steel construction. Insulated core.
For temperature-conscious premises.

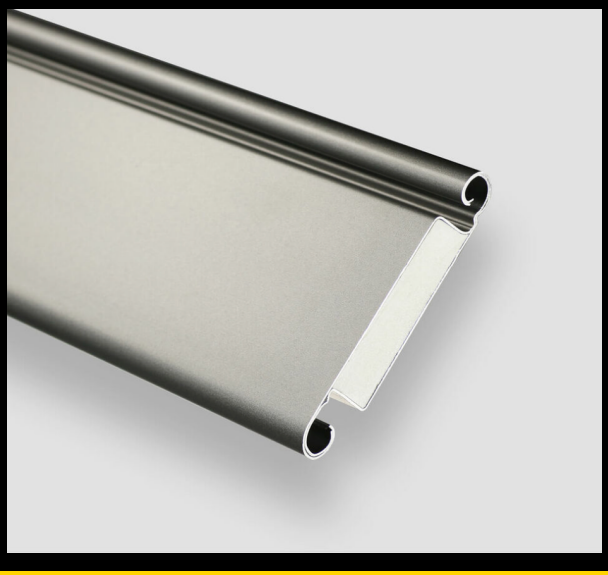

COMMERCIAL **INDUSTRIAL** **DOMESTIC GARAGES**

Designed to reduce heat loss compared with traditional single-skin shutters, this 75mm lath combines two galvanised steel skins with a rigid, CFC-free polystyrene core. A single strengthening rib runs along the profile face.

PRODUCT SPECIFICATION

Profile	75mm twin-skin insulated lath
Steel	Galvanised steel to BS EN 10346:2015
Insulation	Rigid CFC-free polystyrene
Published weight	20.48 kg/m²
Endlocks	Nylon or pressed steel options
Weather sealing	PVC bottom carrier and rubber seal
Guide arrangement	Self-locking guide and brush system

FINISH OPTIONS

Galvanised steel, selected P200 LG Plastisol colours, or powder coating to suit your project. Colour availability is confirmed with your quotation.

SUPPORT FROM SENTRY

Supply-only options
New shutter installations
Replacement curtain enquiries
Repairs and planned servicing
Nationwide project support

LET’S SPECIFY YOUR SHUTTER

Send your opening width and height, site postcode, photographs and preferred finish. Tell us whether you need supply only or installation; we’ll confirm the specification and lead time.

Final suitability, dimensions, operating equipment and safety provisions are confirmed for each project. Thermal and fire performance require separate confirmation for the complete door assembly.