
SENTRY
SECURE BY DEFINITION

PRODUCT GUIDE
ROLLER SHUTTERS

Sentry Automation Ltd

75mm single-skin concave profile shutter lath

Interlocking steel construction.
Solid, perforated or punched options.

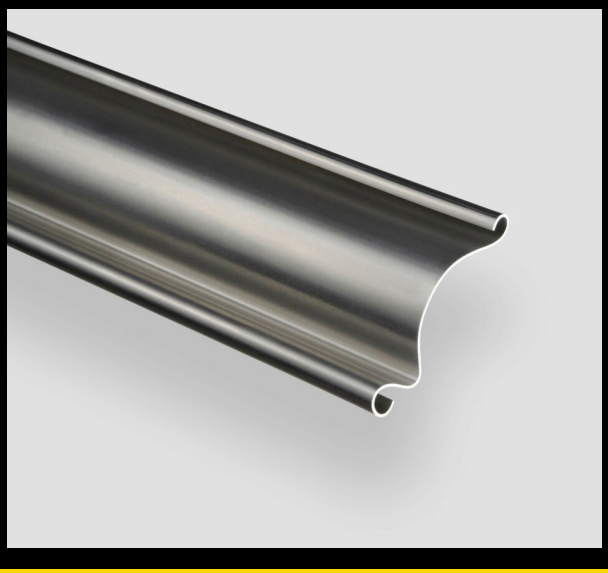

RETAIL & COMMERCIAL | **INDUSTRIAL** | **DOMESTIC GARAGES**

A traditional 75mm concave profile for retail, commercial and industrial roller shutters. Interlocking steel slats form a continuous hinged curtain. Solid, perforated and punched patterns suit applications including shopfronts, car parks, agricultural buildings and garages.

PRODUCT SPECIFICATION

Profile	75mm (3-inch) single-skin concave lath
Steel standard	Galvanised steel to BS EN 10346:2015
0.7mm / 22 swg	Published weight: 9.38 kg/m²
0.9mm / 20 swg	Published weight: 12.07 kg/m²
1.2mm / 18 swg	Published weight: 15.96 kg/m²
Perforated vision	Published 30% visibility
Punched openings	152 × 25mm; 50mm spacing for Inline and Brickbond patterns
Endlock fixing	Cut to length and pre-pierced

FINISH & PATTERN OPTIONS

Solid, perforated, Inline or Brickbond punched patterns. Full P200 LG Plastisol colour range in 0.7mm; selected colours in 0.9mm. Stainless steel grades 304 and 316 are also available. Finish and pattern combinations are confirmed with your quotation.

SUPPORT FROM SENTRY

Supply-only options
New shutter installations
Replacement curtain enquiries
Repairs and planned servicing
Nationwide project support

LET’S SPECIFY YOUR SHUTTER

Send your opening width and height, site postcode, photographs and preferred finish. Tell us whether you need supply only or installation; we’ll confirm the specification and lead time.

Published weights vary with steel thickness and curtain specification. Suitability, operating equipment and safety provisions are confirmed for each project. Any fire rating must be established for the complete tested shutter assembly.