
SENTRY
SECURE BY DEFINITION

PRODUCT GUIDE
ROLLER SHUTTERS

Sentry Automation Ltd

95mm foam-filled insulated shutter lath

Compact profile. Polyurethane core.
For temperature-conscious premises.

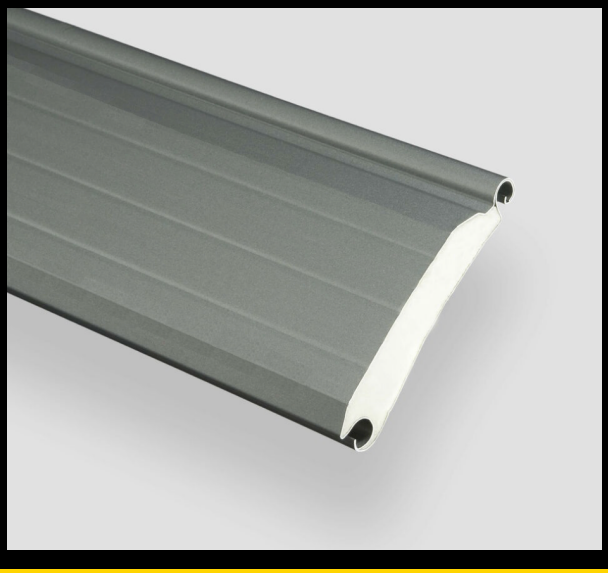

COMMERCIAL **INDUSTRIAL** **DOMESTIC GARAGES**

This 95mm curved lath is formed from a single steel strip around a bonded polyurethane foam core. Its lightweight construction and compact rolling profile suit warehouses, loading bays, agricultural buildings and domestic garages.

PRODUCT SPECIFICATION

Profile	95mm foam-filled insulated lath
Construction	Single-strip galvanised steel to BS EN 10346:2015
Insulation	Bonded rigid polyurethane foam
Published weight	11.99 kg/m²
Acoustic rating	Published 22 dB
Air permeability	Published 1.95 m³/(h·m²) at 50 Pa
Wind resistance	Published Class 5 without wind endlocks
Vision panels	Optional

FINISH OPTIONS

P200 LG Plastisol colours, or galvanised steel suitable for powder coating. Options include heat-resistant nylon endlocks, an aluminium bottom rail with rubber seal, a top connector, and self-locking guides with brushes. Availability is confirmed with your quotation.

SUPPORT FROM SENTRY

Supply-only options
New shutter installations
Replacement curtain enquiries
Repairs and planned servicing
Nationwide project support

LET’S SPECIFY YOUR SHUTTER

Send your opening width and height, site postcode, photographs and preferred finish. Tell us whether you need supply only or installation; we’ll confirm the specification and lead time.

Published acoustic, air and wind figures relate to tested configurations; confirm performance for the specified complete door. Thermal and fire performance require separate confirmation.