
BIONIK 8

Command the wider entrance.

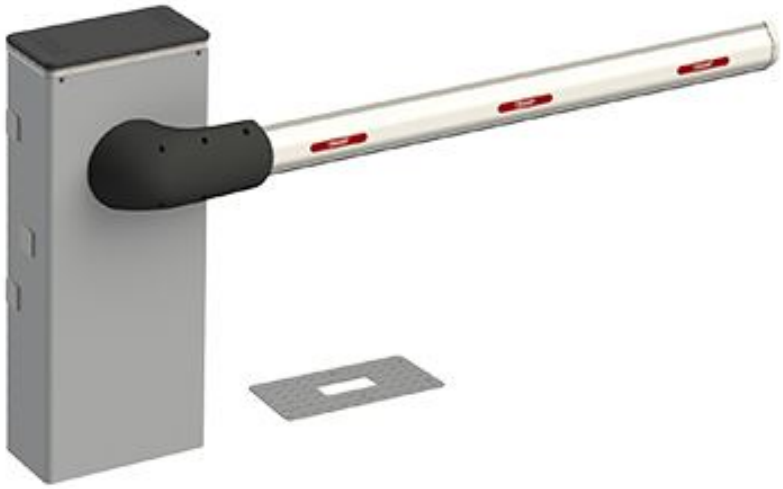

8m
MAXIMUM BOOM

36V
BRUSHLESS MOTOR

2,500
CYCLES / 24 HOURS

A heavy-duty automatic barrier for wide commercial, industrial and logistics entrances. Double-spring balancing and a reinforced, jointed boom support controlled access across spans up to 8m.

Roger technical sources

0113 403 5583 enquiries@sentryautomation.co.uk sentryautomation.co.uk

02 / ENGINEERING

Longer span. Stronger architecture.

01 36V digital brushless motor

Permanent-magnet motor with SENSORED digital encoder technology. Designed for super-intensive barrier operation with low consumption and absolute mechanical positioning.

02 Control where you need it

The digital CTRL unit is positioned at the top of the cabinet for easy access. The protected electronics basket also houses the transformer compartment and battery support.

03 Precision gear train

Aluminium, steel and bronze construction. Helical gears have a 15° inclination, run on high-quality bearings and sit in accurately machined seats for precise shaft alignment. The boom connecting shaft is 55mm.

04 A resilient structure

Steel and bronze components provide stability. Surface treatment and coatings protect the cabinet against atmospheric exposure.



DIGITAL BY DESIGN

A three-phase sinusoidal motor drive and DSP-based, MOSFET digital controller manage movement without traditional control relays. Native encoder feedback supports precise travel, torque, acceleration and deceleration settings.

Roger technical sources

0113 403 5583 enquiries@sentryautomation.co.uk sentryautomation.co.uk

03 / MOTION & OPERATION

Controlled movement. Clear communication.

05 Balanced linkage & springs

Double 85mm balancing springs operate through an adjustable linkage with toothed insert and roller-bearing connection, distributing boom loads and stresses.

06 Configurable head lighting

An LED circuit follows the aluminium head of the cabinet. Lighting behaviour can be configured through the control unit.

07 Absolute position recovery

The absolute positioner sits on the slow gearbox shaft and manages movement in tenths of a degree. Position is retained through a blackout or manual release, avoiding a new learning cycle.

08 Elliptical aluminium boom

Two 4,100mm elliptical aluminium boom sections use reinforced telescopic inserts and a double connecting joint. The assembled installation is limited to 8m by the manual and current product listing.

09 Manual release

A European cylinder key operates the mechanical release, allowing the boom to be released when required.

10 Die-cast boom support

An extended-cone double flange in die-cast aluminium connects to the gearbox for stable boom support and protection.

KEEP ACCESS MOVING

An optional charging card and battery kit support operation during mains failure. The specified Bionik kit uses two 12V, 4.5Ah batteries. Actual autonomy depends on configuration, battery condition and use.

Roger technical sources


0113 403 5583 enquiries@sentryautomation.co.uk sentryautomation.co.uk

04 / TECHNICAL SPECIFICATION

The numbers that shape the installation.

Product codes	BI/008 (230V) / BI/008/115 (115V)
Maximum boom length	Up to 8m
Mains supply	230V AC or 115V AC, 50/60Hz, ±10%, by variant
Motor supply / quantity	36V DC brushless / one motor
Maximum power	300W
Duty / use	Super-intensive / very heavy duty
Torque / gearbox	10–400Nm / irreversible
90° opening time	9–29 seconds
Daily operating cycles	2,500 open / close cycles over 24 hours non-stop
Operating temperature	−20°C to +55°C
Protection rating	IP54
Encoder	Absolute digital / Digital SENSORED
Controller	CTRL
Packaged product weight	104.7kg
Cabinet dimensions	500 × 270 × 1,237mm (published product size)
Release	Gearbox release with European cylinder key
Packages per pallet	4

INSTALLATION ENVELOPE / mm

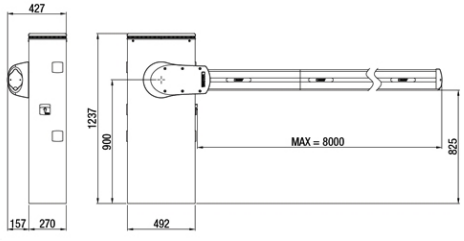

Manufacturer drawing distinguishes cabinet envelope and base dimensions. Confirm foundation, clearance and mounting details against the selected assembly.

Roger technical sources

05 / DIGITAL CONTROL

Configure the movement. Connect the site.

Motor management	SENSORED technology
Magnetic encoder	4,096 pulses per revolution
Position limits	Adjustable open / closed positions; mechanical travel stops
Force settings	Nominal movement, start-up and deceleration
Obstacle response	Detection and motor reversal, including position recovery mode
Speed settings	Opening and closing
Deceleration	Opening and closing
Approach distance	Opening and closing
Soft start	Opening and closing acceleration
Safeguarded movement	Opening / closing function
Stopping & braking	Configurable stopping space and motor braking
Master / slave	Partial opening control
Hold-to-run	Human-presence control
Condominium mode	Available
Safety configuration	Configurable safety devices
Installation test	Programming-button test
Thermal protection	Inverter thermal protection

Radio receivers	H93/RX22A/I fixed code; H93/RX2RC/I rolling code
Accessory supply	24V DC
Cabinet warning light	Included 24V DC LED
Boom LED provision	24V DC / 8m strip
Automation status light	Barrier-open / automation-on output
Courtesy light output	40W
Automatic closing	Timed and guaranteed closing function
Safety edges	8.2kΩ or standard edge management
Battery operation	Optional 2 × 12V DC, 4.5Ah
Magnetic electro-lock	Optional management
Vehicle loop detection	Optional management
Clock	Included
Parking access mode	Included
External status output	Optional configuration
Factory reset	Restore default values
Usage information	Motor-use information available
Password protection	Security-password management
Anti-breakthrough	System enabling function

Functions are shown for the standard BI/008 configuration in the supplied literature. Availability, programming and optional equipment must be confirmed for the selected controller and firmware.

Roger technical sources

0113 403 5583 enquiries@sentryautomation.co.uk sentryautomation.co.uk

06 / BOOMS & INSTALLATION ACCESSORIES

Build the right barrier assembly.

ALED/8C	8-metre LED strip with connection cable for barrier boom (red colour).
KT231	Fixing plate for fixed supports codes BAFS/01, BAFS/02, BAFS/03, BAFS/04, BAFS/05.
BAFS/01	Fixed support with rubber, not adjustable, for booms.
BAFS/03	Fixed support with rubber, not adjustable, with predisposition for bolt, for booms.
BAFS/02	Fixed support with rubber, adjustable telescoping, for booms.
BAFS/04	Fixed support with rubber, adjustable telescoping, with predisposition for bolt, for booms.
BAMS/01	Mobile support for booms.
BARK/02	Painted aluminum skirting, with stainless steel screws mounted on bronze bushings. Single module length 2 meters.
BT12V45	Battery 12V 4.5 Ah (1 pc).
DLD1/24	Loop detector for 1 loop, 2 output, 24V AC/DC.
DLD2/24	Loop detector for 2 loops, 2 outputs + output alarm, 24V AC/DC.
BI/BAT/KIT	Kit for emergency batteries charger for Brushless digital controller CTRL 36V DC with plug-in card, with 2 recovery batteries 12V DC, 4.5 Ah. Kit for BIONIK barrier.
BI/BCHP	Plug-in card, batteries charger, for Brushless digital controller CTRL 36V DC, without recovery batteries, for BIONIK barrier.
KT239	Kit DIN rail with magnetic supports.

Accessory selection is configuration-dependent. Listed items follow the current manufacturer product page; confirm the complete assembly with quotation.

Roger technical sources

07 / POWER, DETECTION & SPECIFICATION

Complete the system. Make access effortless.

BAMS/01/EXT	Extension 20 cm for mobile support BAMS/01.
BAFS/05	Adjustable fixed support with vandal-proof magnetic suction cup, complete with B72/DGS demagnetizer card, for booms.
B73/EXP	Signal status board, 2 output for CTRL - CTRL/P.
KT242	Kit for cable passage with magnetic support for barriers.
SP/85/AS/02	Assembly 2 spring diameter 85 mm for barriers.
BA/128/4	White painted aluminum boom, 4,1 meters long, with LED cover profile and impact resisteng rubber profile.
JNT/BA/128	Internal connection joint, anodised aluminium, with fixing screws for BA/128 booms (2 pieces per installation required).
R99/BASB20	Pack of 20 reflective adhesive stickers for boom barrier.
B73/LTM	RGB boom light and traffic light control device for CTRL.
ALED/8C/RGB	8-metre multicoloured RGB LED (red, green + other colours) strip with connection cable for barrier boom.
BI/BLED/8/RGB	Multicoloured RGB LED strip (red, green + other colours) with connection cable for BI/008 barrier header.
CRA/BAR	Photocell extension column for G90/F2ES / G90/F4ES, offset +23cm from barrier cabinet.
CRA/BAR/M90	Photocell extension column for M90/F2ESO / M90/F4ESO, offset +23cm from barrier cabinet.

Accessory selection is configuration-dependent. Listed items follow the current manufacturer product page; confirm the complete assembly with quotation.


Roger technical sources

08 / PROJECT SPECIFICATION

Plan the entrance. Specify the complete system.

Installation planning / Bionik 8

The supplied manual specifies a 1.5 × 1 × 0.5m foundation pit with conduit routing, subject to the installation conditions. Six anchor ties fasten the base plate; the indicated projection is at least 40mm. Provide a level, stable structural base and the required access for commissioning.

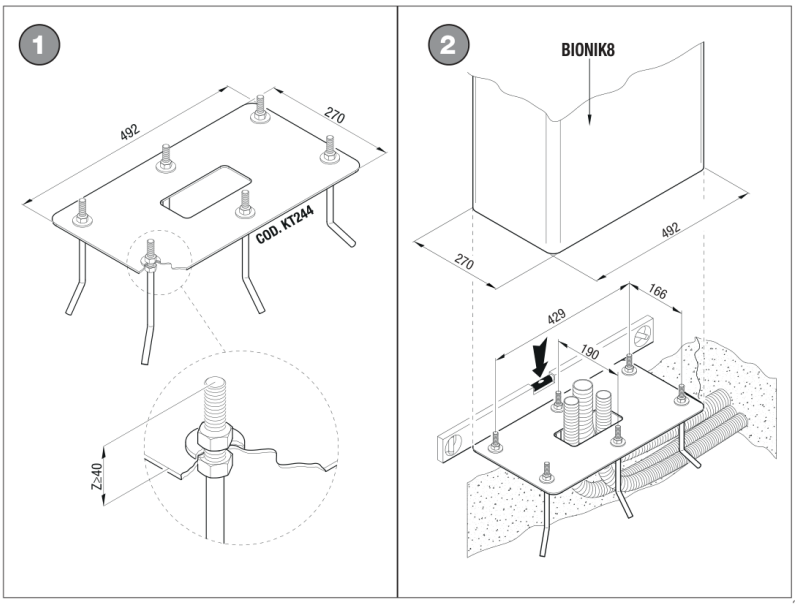

BOOM & BALANCE

Two 4.1m boom sections are joined and trimmed for an installation up to 8m. The manual details two reinforced inserts, a double connecting joint and paired 85mm springs. Balance and mechanical-stop adjustment must match the actual boom and accessories.

ELECTRICAL PROVISION

Manual supply variants: 230V AC, 50Hz or 115V AC, 60Hz, ±10%. Motor drive: 0–36V DC, 0–18A. The manual specifies a 3 × 2.5mm² double-insulated mains cable and an omnipolar isolator with at least 3mm contact separation. Final circuit and protective-device selection forms part of the installation design.

SENTRY AUTOMATION / SUPPLY • INSTALL • MAINTAIN

Send the site photographs, opening dimensions, operating requirements and postcode to enquiries@sentryautomation.co.uk or call 0113 403 5583.

Roger technical sources